



Eca

APPLICATION

Powerflex® RV-K cable is suitable for all types of low voltage industrial-type connections, in urban grids, building installations, etc.

Its high flexibility makes the installation process substantially easier and, as a result, is particularly suitable for use in difficult layouts. It can be buried or installed in a tube as well as outdoors without requiring additional protection.

This cable can withstand damp conditions including total submersion in water (AD8).

CONSTRUCTION

Conductor

Electrolytic annealed copper, class 5 (flexible) according to EN 60228 and IEC 60228.

Insulation

Cross-linked polyethylene, type DIX-3 according to HD 603-1 and type XLPE according to IEC 60502-1.







The standard identification of insulated conductors according to HD 308 is the following:

1 x	Natural
2 x	Blue + Brown
3 G	Blue + Brown + Green/Yellow
3 x	Brown + Black + Grey
3 x + 1 x	Brown + Black + Grey + Blue (reduced cross-section)
4 G	Brown + Black + Grey + Green/Yellow
4 x	Brown + Black + Grey + Blue
5 G	Brown + Black + Grey + Blue + Green/Yellow
6 or more	Black numbered + Green/Yellow

Outer sheath

Flexible PVC, type DMV-18 according to HD 603-1 and type ST2 according to IEC 60502-1.
Black colour.

CHARACTERISTICS

-  **Electrical performance**
Low voltage: 0,6/1 kV.
-  **Thermal performance**
Maximum conductor temperature: 90°C.
Maximum short-circuit temperature: 250°C (max. 5 s).
Minimum service temperature: -40°C (fixed and protected installations).
Minimum installation and handling temperature: 0°C (on cable surface).
-  **Fire performance**
Flame non-propagation according to EN 60332-1 / IEC 60332-1.
Reaction to fire CPR: E_{ca} according to EN 50575.
Reduced halogen emission. Chlorine < 15%.
-  **Mechanical performance**
Minimum bending radius: 5x cable diameter.
Impact resistance: AG2 Medium severity.
-  **Environmental performance**
Chemical & Oil resistance: Good.
UV Resistant according to UNE 211605.
Water resistance: AD8 Submersion.
-  **Installation conditions**
Open Air.
Buried.
In conduit.
In tray.

STANDARDS / COMPLIANCE



According to
IEC 60502-1 / UNE 21123-2




Standards and approvals
AENOR / BUREAU VERITAS / RETIE / KEMA-KEUR / RoHS / CE



CPR (Construction Products Regulation)
E_{ca}



DIMENSIONS & ADMISSIBLE INTENSITIES

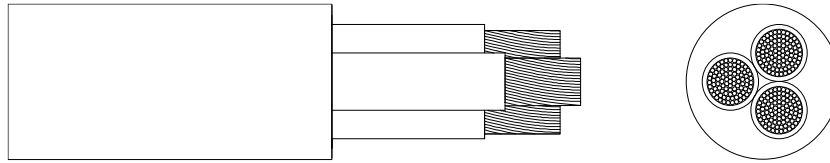

Cross-section (mm ²)	Diameter (mm)	Weight (kg/km)	Open air (A) ¹	Buried (A) ²	Voltage drop (V/A · km) ³
1 x 1,5	5,7	45	28	27	33,9
1 x 2,5	6,2	55	39	35	20,3
1 x 4	6,7	70	53	46	12,6
1 x 6	7,3	90	68	58	8,41
1 x 10	8,2	135	93	77	4,87
1 x 16	9,2	190	124	100	3,08
1 x 25	11,0	285	161	129	1,98
1 x 35	12,1	385	200	155	1,41
1 x 50	13,8	520	242	183	0,984
1 x 70	15,7	715	310	225	0,693
1 x 95	17,6	925	377	270	0,525
1 x 120	19,2	1.165	437	306	0,410
1 x 150	21,5	1.450	504	343	0,328
1 x 185	23,9	1.750	575	387	0,270
1 x 240	26,9	2.280	679	448	0,204
1 x 300	29,6	2.830	783	502	0,163
1 x 400	33,8	3.735	940	592	0,123
1 x 500	37,4	4.780	1.083	670	0,097
1 x 630	42,7	6.280	1.254	762	0,073
1 x 800	51,5	8.235	1.454	870	0,056
1 x 1000	59,9	10.410	1.670	988	0,044
2 x 1,5	8,2	90	26	27	33,9
2 x 2,5	9,2	120	36	35	20,3
2 x 4	10,3	165	49	46	12,6
2 x 6	11,3	215	63	58	8,41
2 x 10	13,2	320	86	77	4,87
2 x 16	14,9	450	115	100	3,08
2 x 25	20,8	810	149	129	1,98
2 x 35	22,0	1.000	185	155	1,41
2 x 50	25,7	1.375	225	183	0,984
2 x 70	29,5	1.880	289	225	0,693
2 x 95	33,0	2.430	352	270	0,525
3 G 1,5	8,9	110	26	27	33,9
3 G 2,5	9,8	145	36	35	20,3
3 G 4	11,0	200	49	46	12,6
3 G 6	12,1	265	63	58	8,41
3 G 10	14,3	405	86	77	4,87
3 x 16	16,4	595	115	100	3,08
3 x 25	20,7	955	149	129	1,98
3 x 35	23,1	1.275	185	155	1,41
3 x 50	26,8	1.750	225	183	0,984
3 x 70	29,6	2.370	289	225	0,693
3 x 95	35,0	3.140	352	270	0,525

Cross-section (mm ²)	Diameter (mm)	Weight (kg/km)	Open air (A) ¹	Buried (A) ²	Voltage drop (V/A · km) ³
3 x 120	39,8	4.115	410	306	0,41
3 x 150	44,7	5.130	473	343	0,328
3 x 185	49,9	6.285	542	387	0,270
3 x 240	54,1	7.875	641	448	0,204
3 x 300	62,3	10.100	741	502	0,163
3 x 400	72,1	13.435	886	592	0,123
3x16+1x10	17,6	700	115	100	3,08
3x25+1x16	22,7	1.140	149	129	1,98
3x35+1x16	25,0	1.480	185	155	1,41
3x50+1x25	29,1	2.050	225	183	0,984
3x70+1x35	33,8	2.850	289	225	0,693
3x95+1x50	38,2	3.700	352	270	0,525
3x120+1x70	42,1	4.750	410	306	0,410
3x150+1x70	46,8	5.800	473	343	0,328
3x185+1x95	53,5	7.200	542	387	0,270
3x240+1x120	58,5	9.100	641	448	0,204
4 G 1,5	9,7	130	26	27	33,9
4 G 2,5	10,7	175	36	35	20,3
4 G 4	12,0	245	49	46	12,6
4 G 6	13,4	330	63	58	8,41
4 G 10	15,7	505	86	77	4,87
4 x 16	18,2	750	115	100	3,08
4 x 25	24,1	1.245	149	129	1,98
4 x 35	26,3	1.675	185	155	1,41
4 x 50	31,3	2.315	225	183	0,984
4 x 70	36,1	3.205	289	225	0,693
4 x 95	40,2	4.130	352	270	0,525
4 x 120	44,6	5.245	410	306	0,410
4 x 150	49,8	6.575	473	343	0,328
4 x 185	56,1	8.050	542	387	0,270
4 x 240	64,5	10.695	641	448	0,204
4 x 300	68,4	12.885	741	502	0,163
5 G 1,5	10,4	155	26	27	33,9
5 G 2,5	11,6	215	36	35	20,3
5 G 4	13,2	300	49	46	12,6
5 G 6	14,7	405	63	58	8,41
5 G 10	17,1	625	86	77	4,87
5 G 16	20,2	935	115	100	3,08
5 G 25	26,6	1.555	149	129	1,98
5 G 35	29,3	2.080	185	155	1,41
5 G 50	34,5	2.895	225	183	0,984
5 G 70	38,7	3.930	289	225	0,693
5 G 95	44,6	5.190	352	270	0,525
5 G 120	49,7	6.560	410	306	0,410
5 G 150	55,6	8.145	473	343	0,328
5 G 185	62,5	9.975	542	387	0,270
5 G 240	71,8	13.210	641	448	0,204
7 G 1,5	11,2	190	26	27	33,9
7 G 2,5	12,4	265	36	35	20,3
10 G 1,5	13,2	260	26	27	33,9
10 G 2,5	16,3	380	36	35	20,3

Cross-section (mm ²)	Diameter (mm)	Weight (kg/km)	Open air (A) ¹	Buried (A) ²	Voltage drop (V/A · km) ³
12 G 1,5	14,2	295	26	27	33,9
12 G 2,5	15,7	420	36	35	20,3
14 G 1,5	14,9	315	26	27	33,9
24 G 1,5	20,4	550	26	27	33,9

¹ Reference method F for single-core and method E for multicore cables according to IEC 60364-5-52 in open air at 30°C ambient temperature.

² Reference method D2 according to IEC 60364-5-52. Directly buried at 0,7 m depth with soil thermal resistivity of 2,5 K·m/W and 20°C of ground temperature.

³ At maximum conductor temperature and $\cos\phi=1$.

In all cases are supposed a single-phase circuit.

SHORT-CIRCUIT CURRENT-CARRYING CAPACITIES

Time (s)	0,1	0,2	0,3	0,5	1	1,5	2	2,5	3
A/mm²	452	320	261	202	143	117	101	90	83

CORRECTION FACTORS FOR AIR TEMPERATURE

Air T. (°C)	20	25	30	35	40	45	50	55	60
Factor	1,08	1,04	1	0,96	0,91	0,87	0,82	0,76	0,71

CORRECTION FACTORS FOR GROUND TEMPERATURE

Ground T. (°C)	10	15	20	25	30	35	40	45	50
Factor	1,07	1,04	1	0,96	0,93	0,89	0,85	0,80	0,76

CORRECTION FACTORS FOR SOIL THERMAL RESISTIVITY

Moisture degree of soil	Very damp	Slightly damp	Slightly dry	Dry	Very dry
Thermal Resist. (K·m/W)	1	1,5	2	2,5	3
Factor	1,50	1,28	1,12	1	0,90

Other correction factors (for grouping cables, for harmonic currents), that are not in this specification, can be applied. Further information can be found in IEC 60364-5-52.