







KMI




KMI-1/25A  
KMI-1/40A  
KMI-1/63A



KMI-3/40A  
KMI-3/63A  
KMI-3/80A  
KMI-3/100A



KMI-4/100A

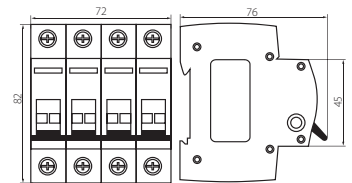

PRĄD ZNAMIONOWY RATED CURRENT IN(A)	IŁOŚĆ BIEGUNÓW NUMBER OF POLES	SYMBOL SYMBOL	INDEKS INDEX	PAKOWANIE PACKAGING
25A	1	KMI-1/25A	23230	-/12/120
40A	1	KMI-1/40A	23231	-/12/120
63A	1	KMI-1/63A	23236	-/12/120
40A	3	KMI-3/40A	23232	-/4/120
63A	3	KMI-3/63A	23233	-/4/120
80A	3	KMI-3/80A	23234	-/4/120
100A	3	KMI-3/100A	23235	-/4/120
100A	4	KMI-4/100A	23237	-/3/120

## PL

**Rozłącznik izolacyjny:** służy do rozłączania obwodów obciążonych prądem znamionowym  
**Zgodność z normą:** EN / IEC60947-3  
**Napięcie znamionowe**  
**łączeniowe:** 1biegun 230/400V AC 50/60Hz / 3,4 bieguny 400V AC 50/60Hz  
**Temperatura pracy:** -25°C do +45°C, wilgotność 95%  
**Pojemność zacisków:** do 50 mm<sup>2</sup>  
**Stopień ochrony:** IP20  
**Kategoria użytkowania:** AC-22A

## GB

**Switch disconnectors:** are used to disconnect rated current circuits  
**Compliance with:** EN / IEC60947-3  
**Rated breaking voltage:**  
 1 pole 230/400V AC 50/60Hz  
 3,4 poles 400V AC 50/60Hz  
**Operating temperature:** 25°C do +45°C, humidity 95%  
**Capacity of terminals:** up to 50 mm<sup>2</sup>  
**Degree of protection:** IP20  
**Utilization category:** AC-22A