


LTF12-10.0

LTF12-16.0

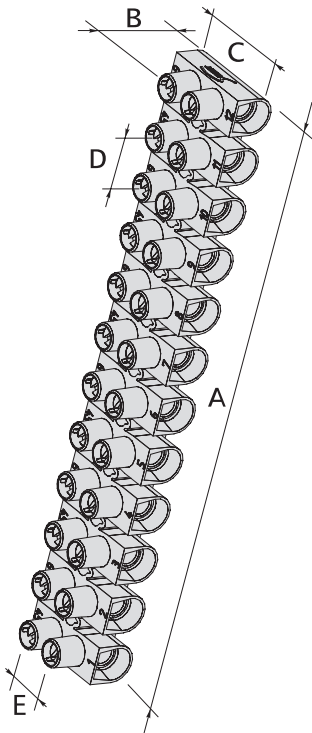

10[□]

16[□]

Nr kat. - kolor / No. Cat. - Colour	21 512 108	21 612 108
Pomarańczowy / Orange ●		
Norma / Norm	PN-EN 60998-1:2006 PN-EN 60998-2-1:2006	PN-EN 60998-1:2006 PN-EN 60998-2-1:2006
Certyfikaty / Certificates	Ⓟ Ⓡ Ⓢ Ⓣ Ⓤ Ⓥ Ⓦ Ⓧ Ⓨ Ⓩ	Ⓟ Ⓡ Ⓢ Ⓣ Ⓤ Ⓥ Ⓦ Ⓧ Ⓨ Ⓩ
Przekrój znamionowy / Cross section		
Drut / Solid	4 ... 10 mm ²	6 ... 16 mm ²
Linka / Stranded	4 ... 6 mm ²	6 ... 10 mm ²
Temperatura użytkowa / Using temperature	-40 °C ... +55 °C	-40 °C ... +55 °C
Dane prądowe / Rated data		
Napięcie znamionowe / Rated voltage	750 V	750 V
Prąd znamionowy / Current	57 A	76 A
Wymiary zewnętrzne / Dimensions		
A / B / C / D / E	141 / 20 / 25 / 12 / 9 mm	153 / 22 / 27 / 13 / 10 mm
Długość odizolowania przewodu Insulation stripping length	8 mm	8.5 mm
Śruba dociskowa / Clamping screw	M 4	M 5
Mocowanie do podłoża / Mounting hole	M 4x18	M 4x18
Masa / Weight	69 g	95 g
Opakowanie zbiorcze / Collective package	25 szt.	50 szt.