



Dławice MG - szare


materiał: poliamid 6 + PVC

kolor: szary RAL7035

stopień szczelności: IP68

temp. pracy: -40°C do +80°C

tolerancja: ±5%

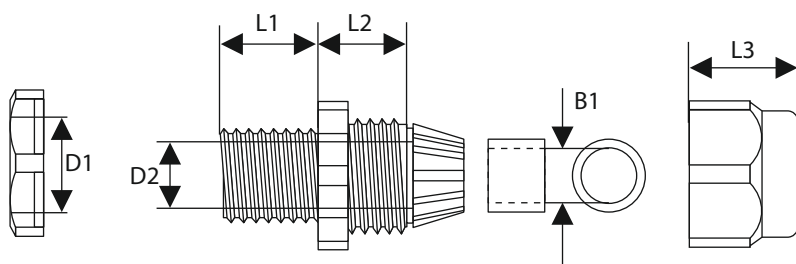

TYP	SKOK GWINTU [mm]	WYMIARY [mm]						ZAKRES DŁAWIENIA PRZEWODÓW [mm]	OPAKOWANIE [szt]	
		D1	D2	B1	L1	L2	L3			
MG-12	1,5	12	8,3	5,0	8,0	12,1	13,3	3 - 6,5	50	<input type="checkbox"/>
MG-16	1,5	16	10,9	9,6	15,0	14,4	16,7	5 - 10	50	<input type="checkbox"/>
MG-20	1,5	20	14,8	12,9	15,0	19,5	18,4	10 - 14	50	<input type="checkbox"/>
MG-25	1,5	25	18,5	16,5	15,0	19,5	22,3	13 - 18	50	<input type="checkbox"/>
MG-32	1,5	32	25,9	23,3	15,0	20,3	26,1	18 - 25	25	<input type="checkbox"/>
MG-40	1,5	40	31,4	30,6	18,0	23,4	31,9	22 - 32	10	<input type="checkbox"/>
MG-50	1,5	50	41,2	38,2	19,0	25,7	31,6	30 - 38	10	<input type="checkbox"/>
MG-63	1,5	63	54,1	42,2	20,0	26,2	32,6	31 - 44	5	<input type="checkbox"/>

CE RoHS Compliant **IP68**