



Fuse-link with blink application, D02, 25A, 400 V, gL/gG, set consists of 3 pcs.



Powering Business Worldwide™

Part no. Z-SLS/B-25A
Catalog No. 268990

Similar to illustration

Delivery program

Product range			Fuse material
Basic function			Accessories
Basic function			Fuse sets
For use with			Z-SLS/NEOZ Z-SLK/NEOZ Z-SLS/CEK
			With flashing function Snap-fit on DIN rail 1 set consists of: 3 fuse-links, 3 current codings, 1 plastic box in the colour of the indicator
Rated operating voltage			60 - 400 V AC
Rated uninterrupted current	I_U	A	25

Technical data

Electrical

Rated operational voltage	U_e	V	
Rated operating voltage	U_e	V AC	60 ... 400
		V DC	60 - 220
Utilization category			gL (gL)
Test voltage		kV	5

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I_n	A	25
Heat dissipation per pole, current-dependent	P_{vid}	W	0
Equipment heat dissipation, current-dependent	P_{vid}	W	2.4
Static heat dissipation, non-current-dependent	P_{vs}	W	0
Heat dissipation capacity	P_{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
			0


Technical data ETIM 6.0

Circuit breakers and fuses (EG000020) / D0-system fuse link (EC001642)

Electric engineering, automation, process control engineering / Electrical installation, device / Safety fuse systems / Neozed fuse link (ecl@ss8.1-27-14-21-19 [ACN353008])

Construction size			D02
Nominal rated current		A	25
Nominal rated voltage		V	400
Colour code			Yellow
Utilization category			gL/gG (cable protection/equipment protection)

Characteristics

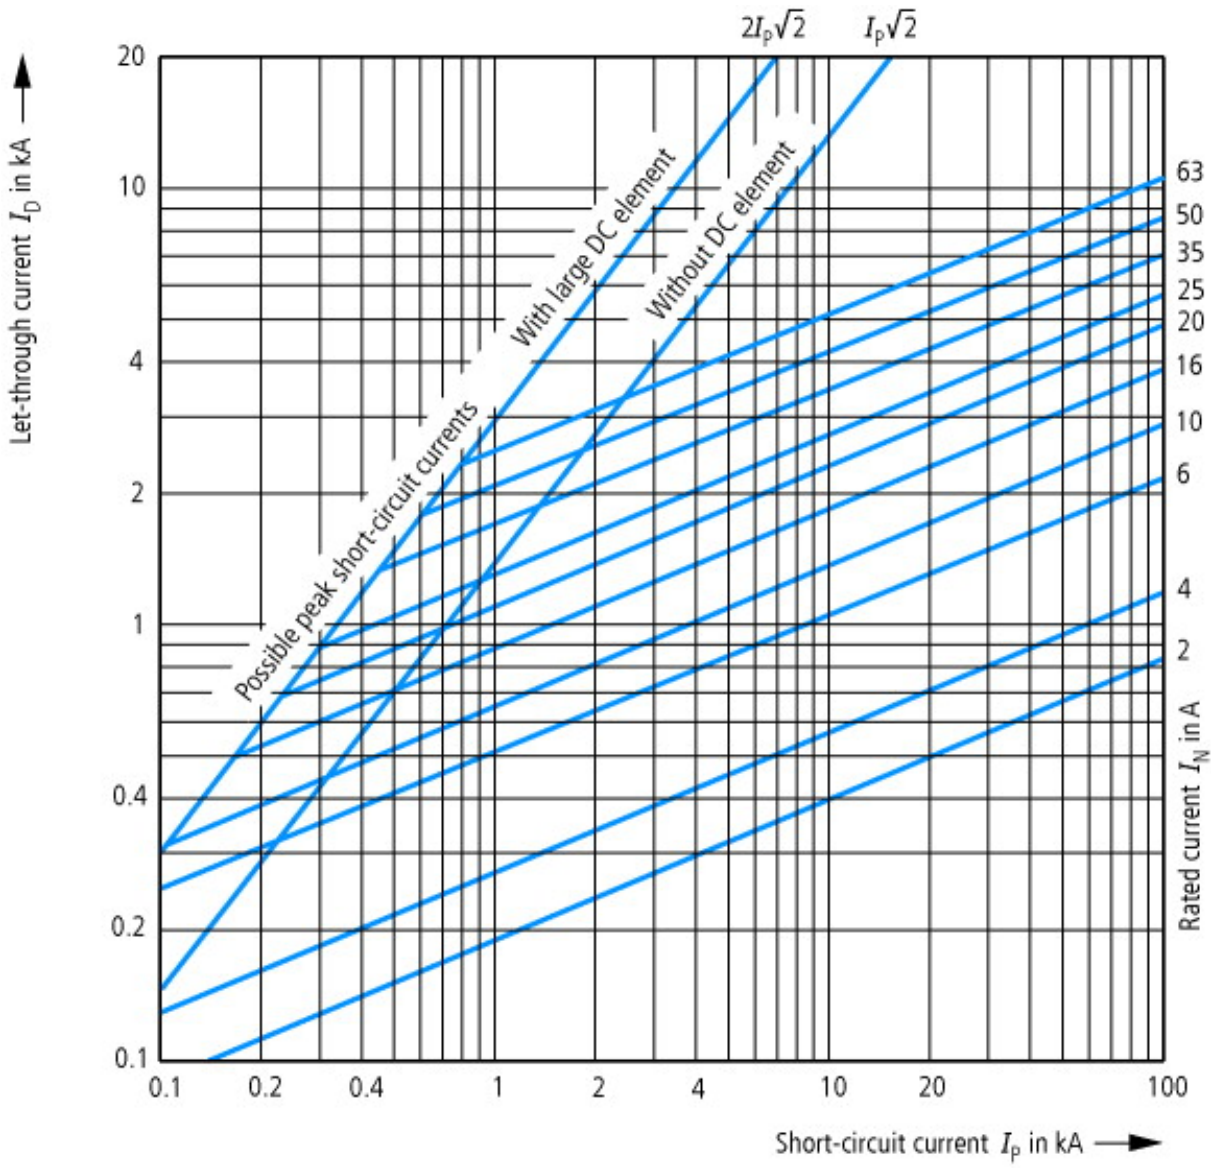

Let-through current characteristic, D0 fuse links 2...63 A gG(gL)



Time/current characteristic, D0 fuse links 2...63 A gG(gL)