


Product Specification Sheet

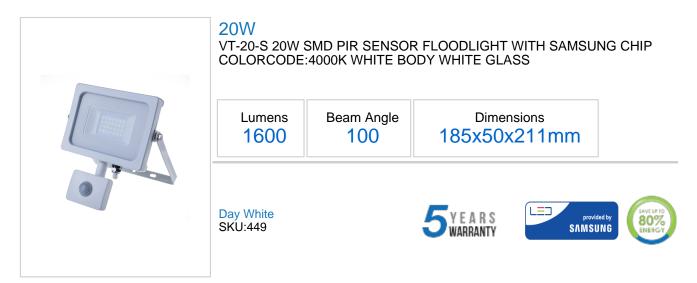

Technical Information

atts:	20
mens:	1600
m Angle:	100
ion Distance:	2-8m
ction Angle:	100
olor:	White
dy Type:	Die Cast Aluminium
r Type:	PIR
ong life:	30,000 Hours

Features

- Perfect replacement of Metal Halide Floodlight, High-Pressure Sodium Floodlight & Halogen Floodlight
 - High Power LED Samsung Chip 1 Meter Wire
 - Elevated level of Energy saving with LED + PIR
 - Premium Quality Die Casting Aluminium Body IP Protection IP65
 - Manual Override Function Switch OFF-ON, OFF-ON twice within 3seconds
 - Built-in driver no external power supply required
 - **Corrosion Resistant**
 - Available in different color options of White , Day White & Warm White
 - Application Driveways, Gardens, Building, Security Lighting etc



Suitable & Recommended for maximum daily use of 10-12 hours, usage beyond this would void the warranty

Packaging

Unit Details		Listing Details			
Gross Weight(GW) Kgs	0.8275	EAN Code	3800157631051		
Unit CBM	0.002577	Commodity Code	9405403990		
Master Box Packaging					
Master Box Qty (Pcs Per Carton)	20				
READY STOCKS IN UK & EU Www.vtacexports.com					