



Fuse-link with blink application, D02, 32A, 400 V, gL/gG, set consists of 3 pcs.

Part no. Z-SLS/E-32A
Catalog No. 289979

Similar to illustration

Delivery program

| | | | |
|-------------------------|--|--|--|
| Product range | | | Fuse material |
| Basic function | | | Accessories |
| Basic function | | | Fuse sets |
| For use with | | | Z-SLS/NEOZ Z-SLK/NEOZ Z-SLS/CEK |
| | | | Snap-fit on DIN rail 1 set consists of: 3 fuse-links, 3 current codings, 1 plastic box in the colour of the indicator |
| Rated operating voltage | | | 400 V AC, 220 V DC |

Technical data


Electrical

| | | | |
|---------------------------|-------|------|---------|
| Rated operational voltage | U_e | V | |
| Rated operating voltage | U_e | V AC | 400 |
| | | V DC | 220 |
| Utilization category | | | gG (gL) |
| Test voltage | | kV | 5 |


Technical data ETIM 6.0

| | | | |
|--|--|---|---|
| Circuit breakers and fuses (EG000020) / D0-system fuse link (EC001642) | | | |
| Electric engineering, automation, process control engineering / Electrical installation, device / Safety fuse systems / Neozed fuse link (ecl@ss8.1-27-14-21-19 [ACN353008]) | | | |
| Construction size | | | D02 |
| Nominal rated current | | A | 32 |
| Nominal rated voltage | | V | 400 |
| Colour code | | | Black |
| Utilization category | | | gL/gG (cable protection/equipment protection) |

Characteristics

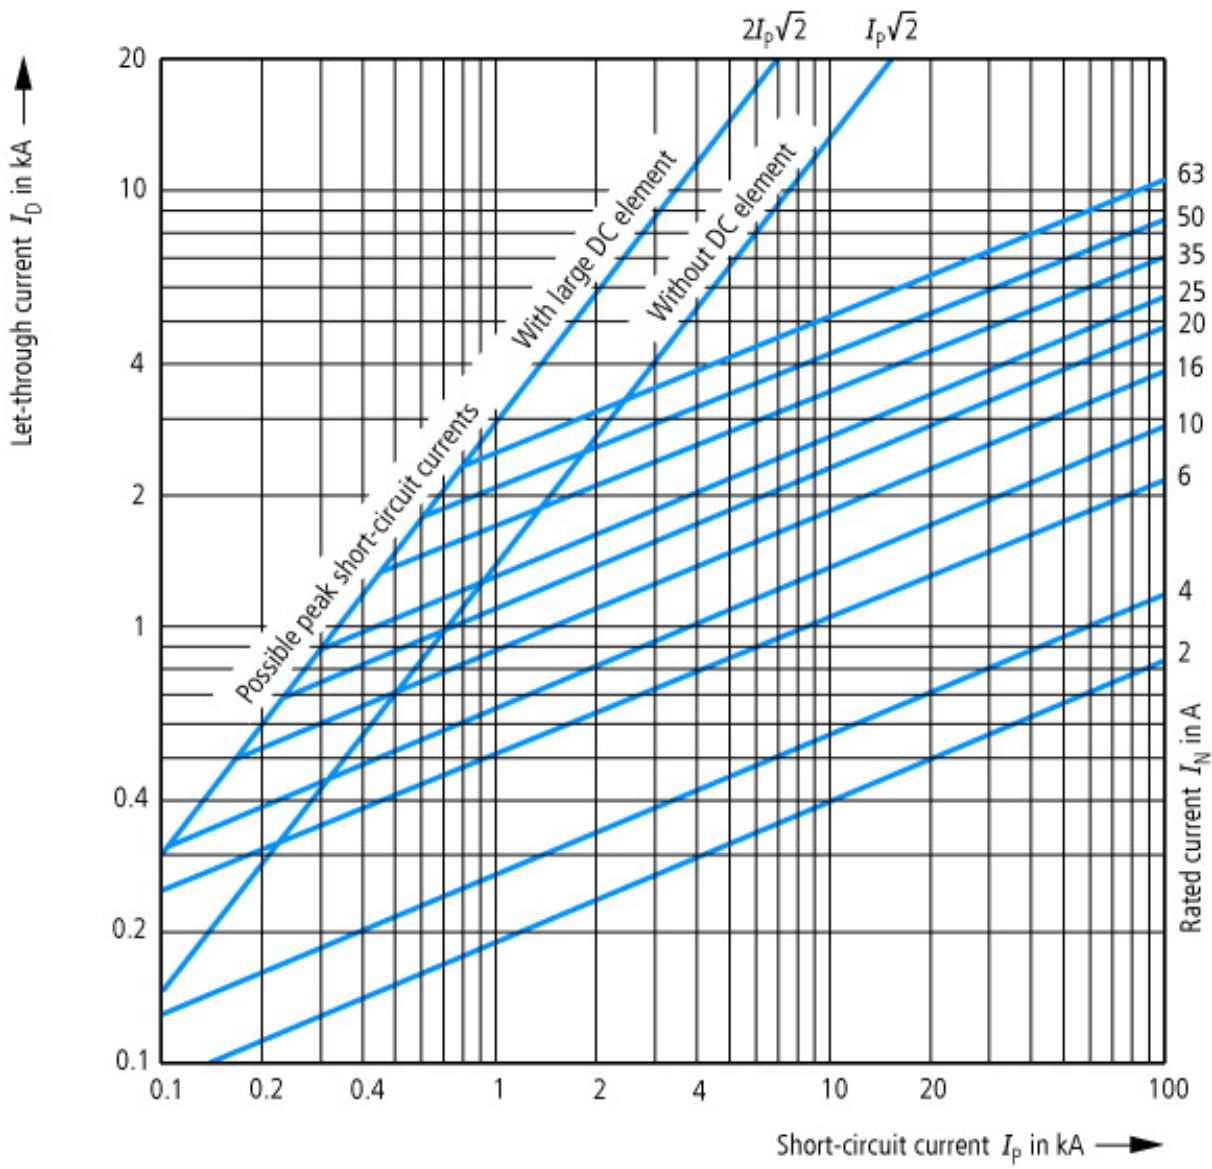

Let-through current characteristic, D0 fuse links 2...63 A gG(gL)

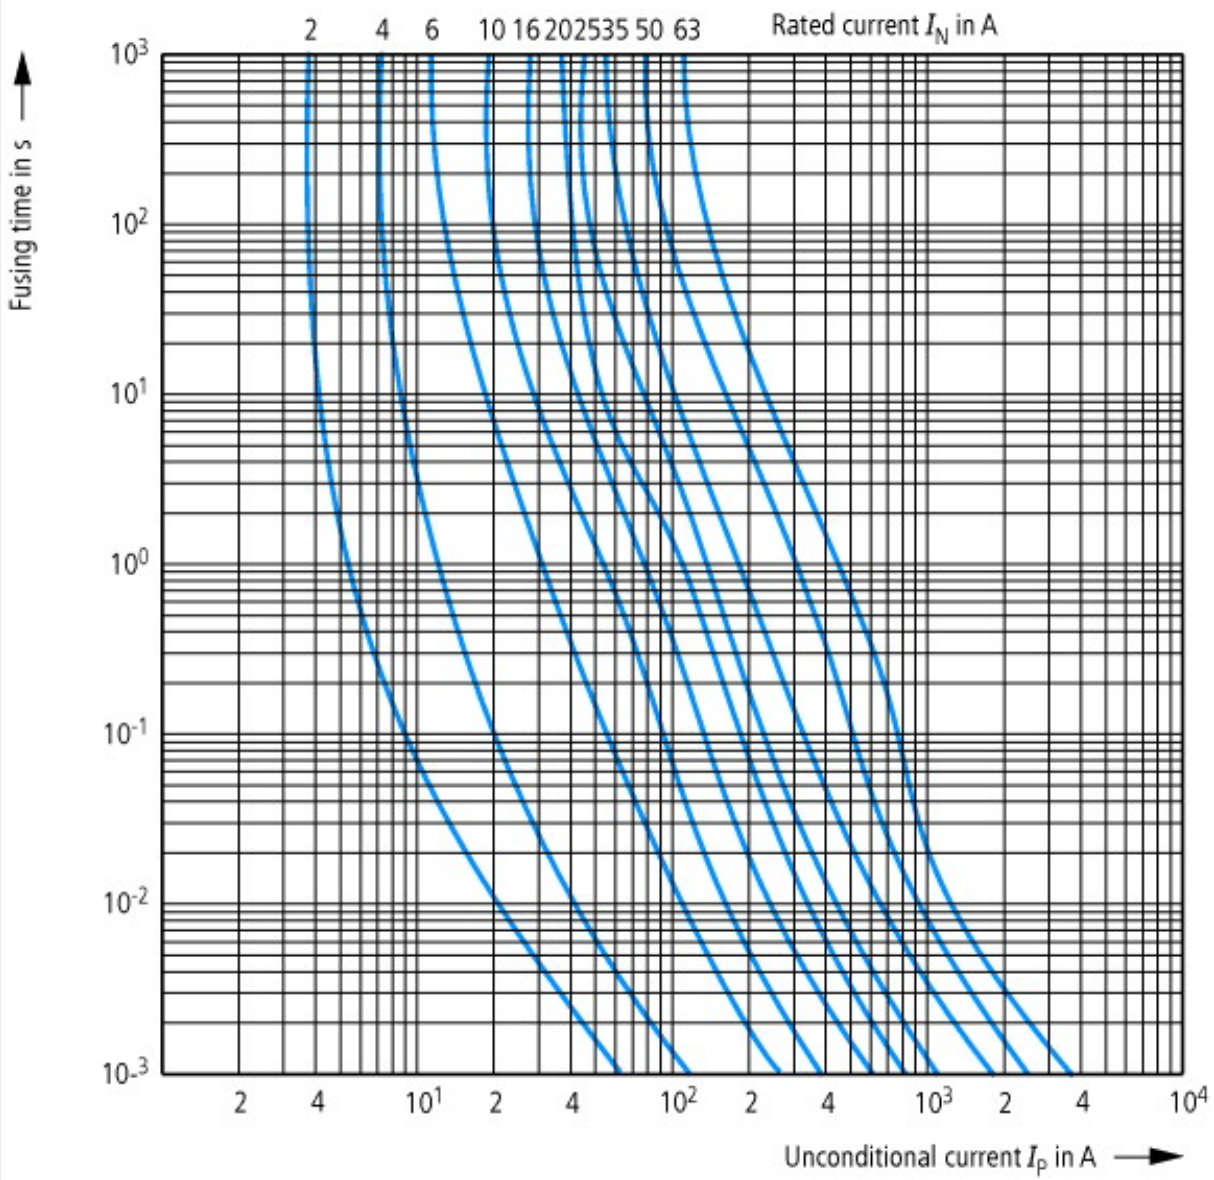

Time/current characteristic, D0 fuse links 2...63 A gG(gL)